

Reproducing LhARA stage 1 BDSIM results

WP6 LhARA meeting

23/02/2026

Marie Mannie-Corbisier

Supervisor: William Shields

Proton source definition (from CDR draft)

	Previous	Current
rpmax (sin(α)) (Angle cutoff)	0.005 ($\neq \sin(2.75^\circ)=0.05$)	0.0287($=\sin(1.64^\circ)$)
E_laser	10J	70J
E_proton_ref	15 MeV	15 MeV
Kmax (max K energy emitted)	None	25 MeV
Thickness	5e-6 m	4e-7 m
Duration	4e-14s	2.8e-14s
Laser Power (P)	2.5e14 W	2.5e15 W
Laser Intensity (I)	4e20 W/cm ²	4e20 W/cm ²
Laser spot radius (sqrt(P/(I* π)))	1.5e-6 m	5.6e-6 m

Current values: CDR =>[80] N. Dover et al. LhARA linear optics documentation. Report LhARA-TN-07.

<https://ccap.hep.ph.ic.ac.uk/trac/raw-attachment/wiki/Research/LhARA/Documents/LhARA-TN-2024-07.pdf>. (CDR p.13)

Code issue resolved in 2BDSIM.py

```
opts, args = getopt.getopt(argv,"hd:i:o:l:n:",["ifile=", "ofile=", "loc", "nEvts"])
```

└ Location ("loc") of the element in the beamline is an argument

```
iPrtcl.writeParticleBDSIM(ibmIOw.getdataFILE(), 1, True)
```

└ Previously not used

```
iPrtcl.writeParticleBDSIM(ibmIOw.getdataFILE(), iLoc, True)
```

└ Changed

Code issue resolved in writeParticleBDSIM.py

```
try
    if self.getDebug():
        with np.printoptions(linewidth=500,precision=5,suppress=True):
            print("      ----> iAddr, iLoc, name:", iAddr, iLoc, \
                BLE.BeamLineElement.getinstances()[iLoc].getName())
            print("      ----> Trace space:", self.getTraceSpace()[iAddr])

    """
    reportString = "distrFileFormat = " +
        "x[m]:y[m]:z[m]:xp[rad]:yp[rad]:E[MeV]\n";
    """

    Line = str(self.getTraceSpace()[iAddr][0]) + ' ' + \
        str(self.getTraceSpace()[iAddr][2]) + ' ' + \
        str(z) + ' ' + \
        str(self.getTraceSpace()[iAddr][1]) + ' ' + \
        str(self.getTraceSpace()[iAddr][3]) + ' ' + \
        str(E) + "\n"



    ParticleFILE.write(Line)
    if self.getDebug():
        print("      ----> Line:", Line)

    if CleanAfterWrite:
        Cleaned = self.cleanParticles()
except IndexError:
    pass
```

'Try-except' added to handle cases where the particle did not reach the element of interest



Source distribution at the exit of the nozzle **without GPT**

CDR

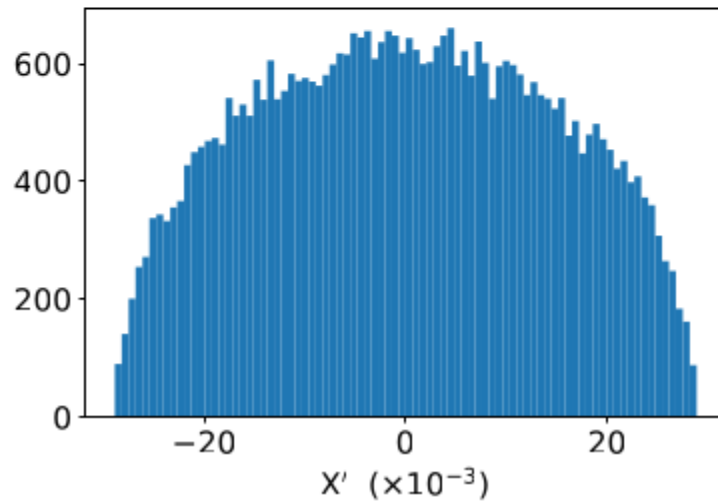
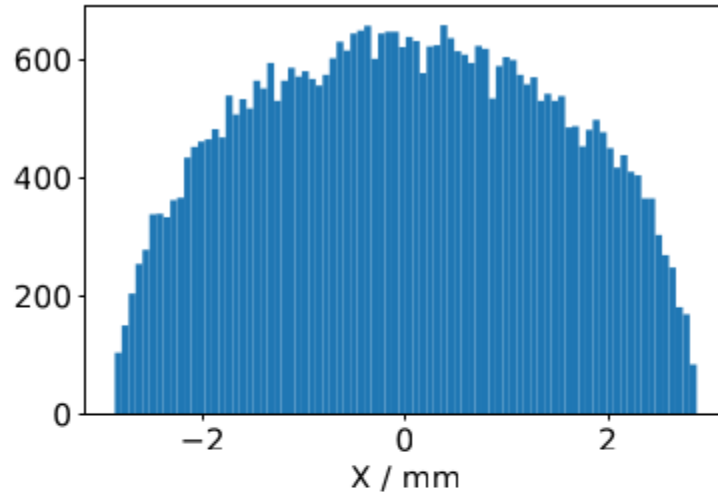


Correct

Myself

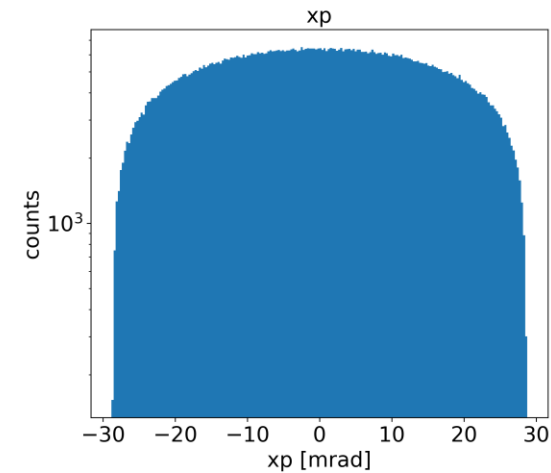
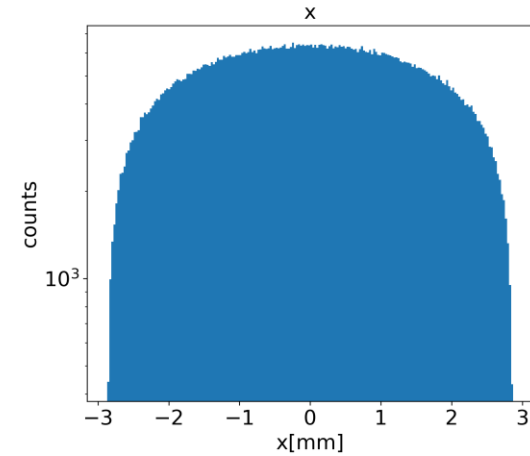


CDR

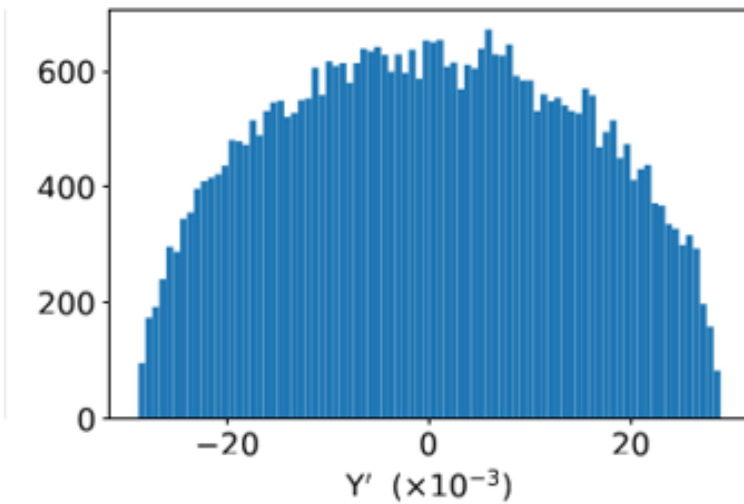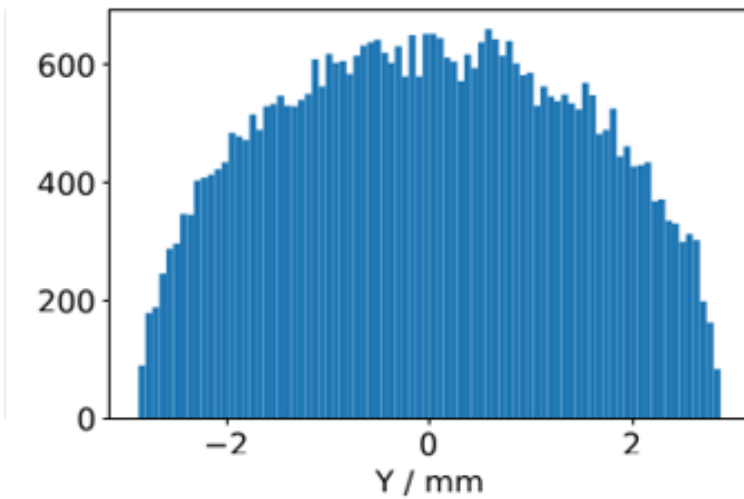


Correct


Myself

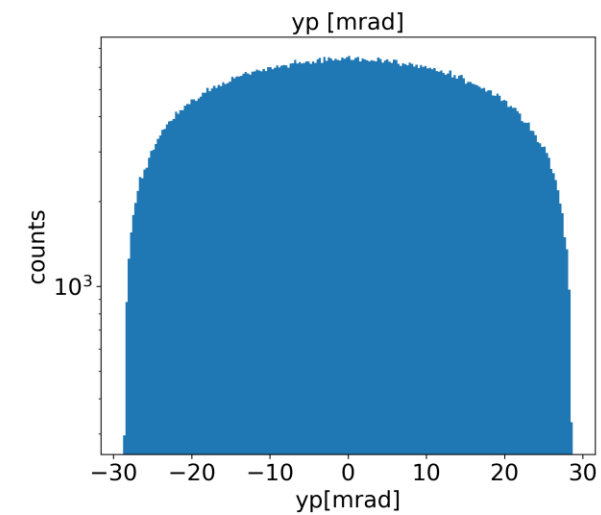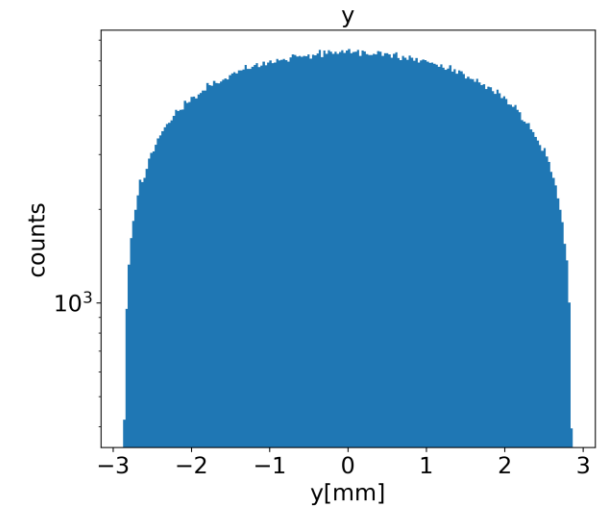


Myself

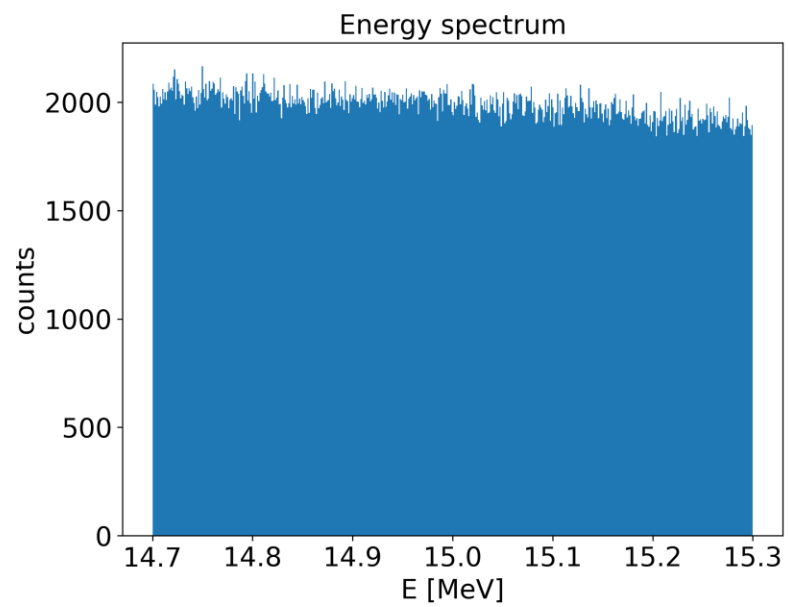


CDR

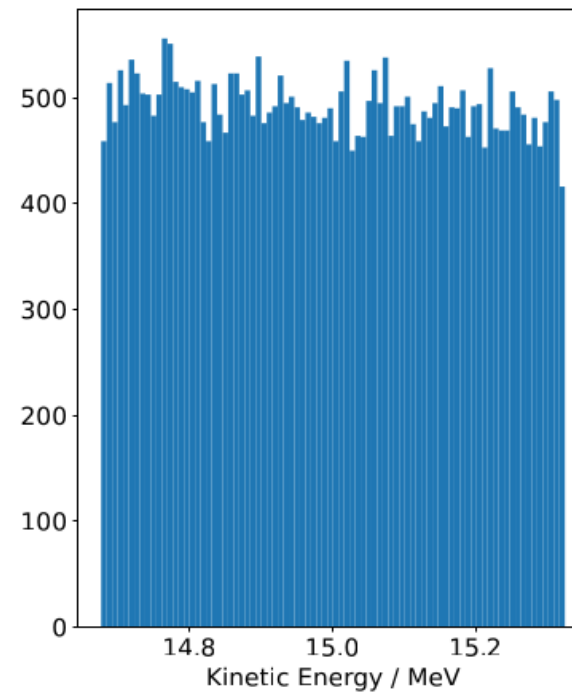


Myself

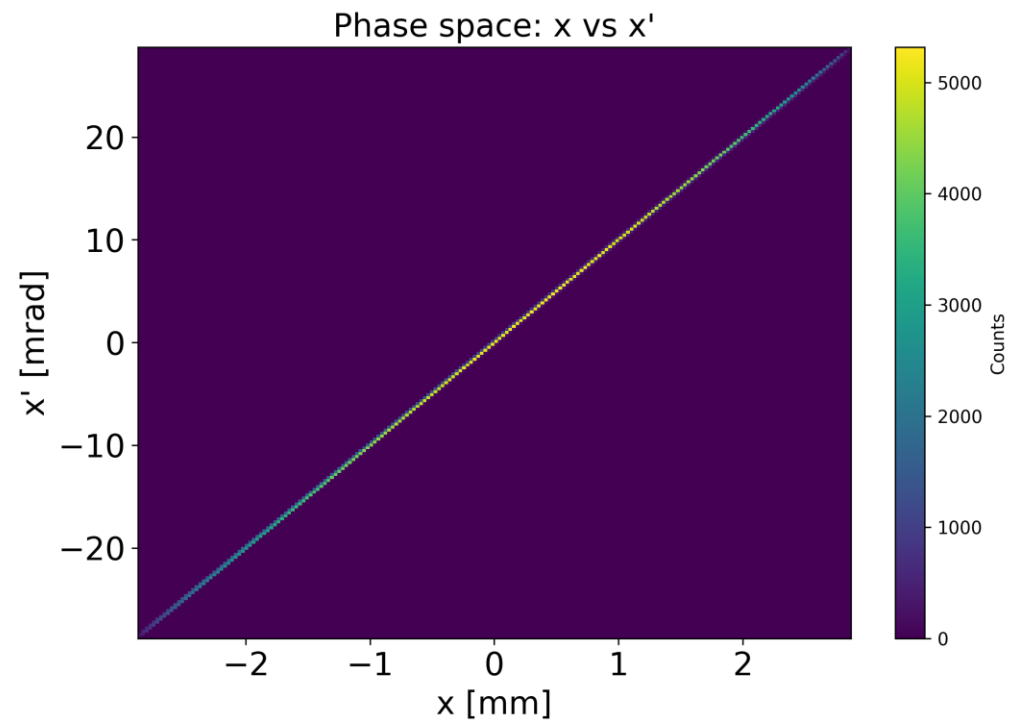


CDR

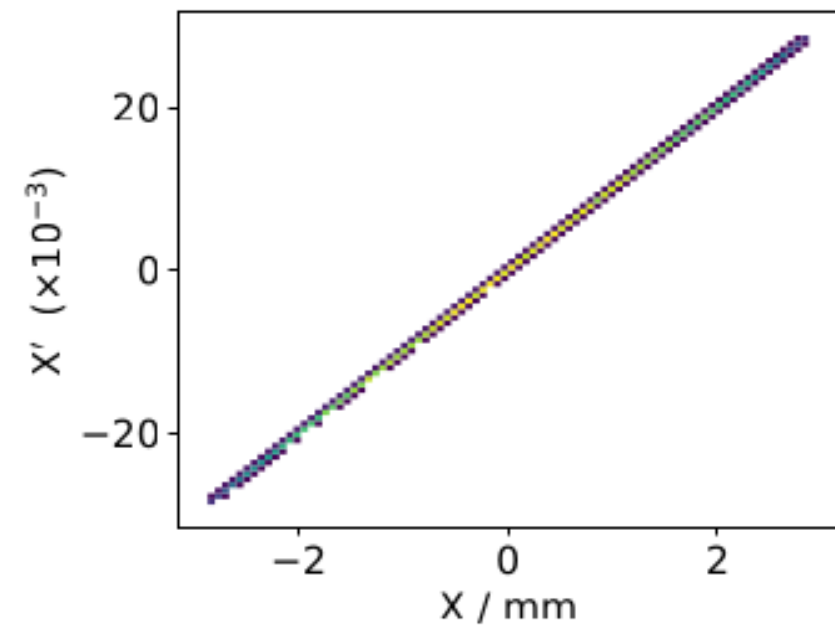


Myself

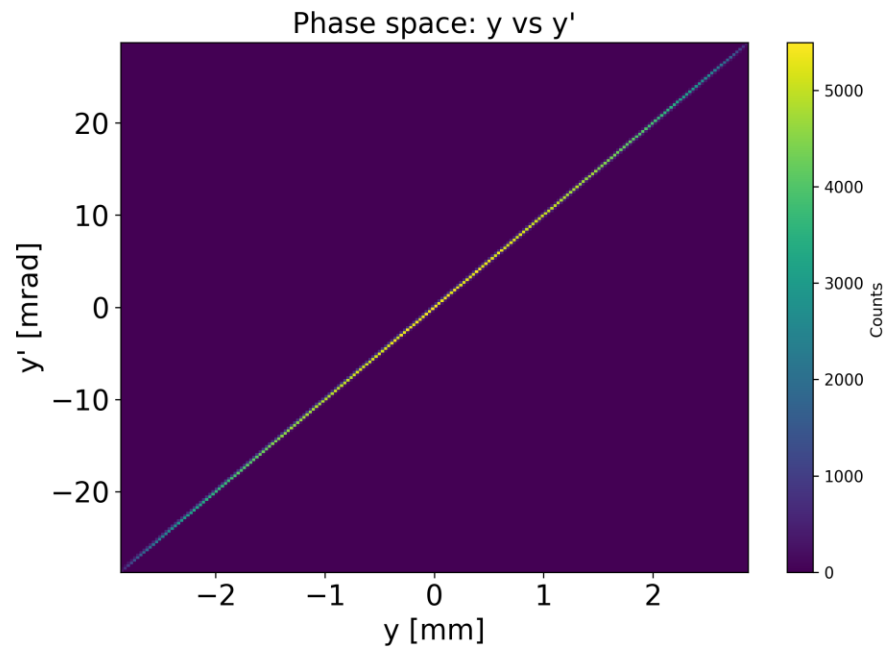


CDR

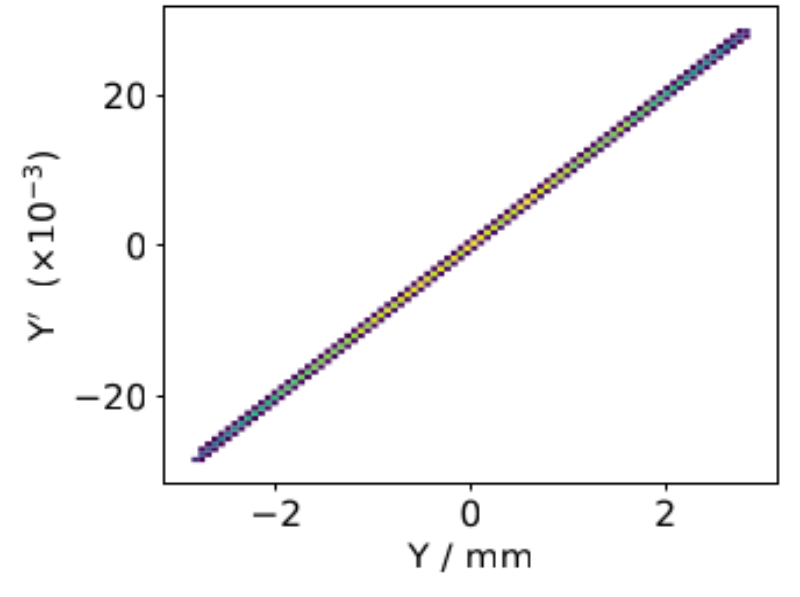


Myself

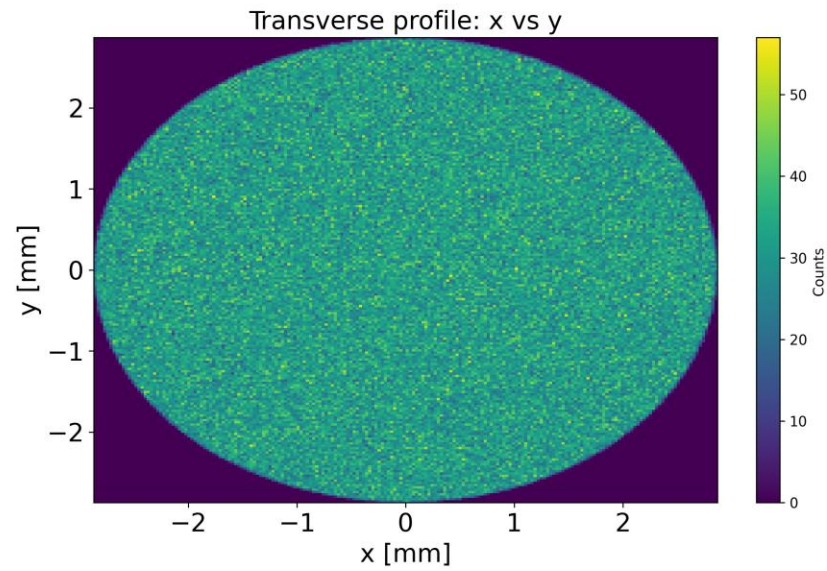


CDR

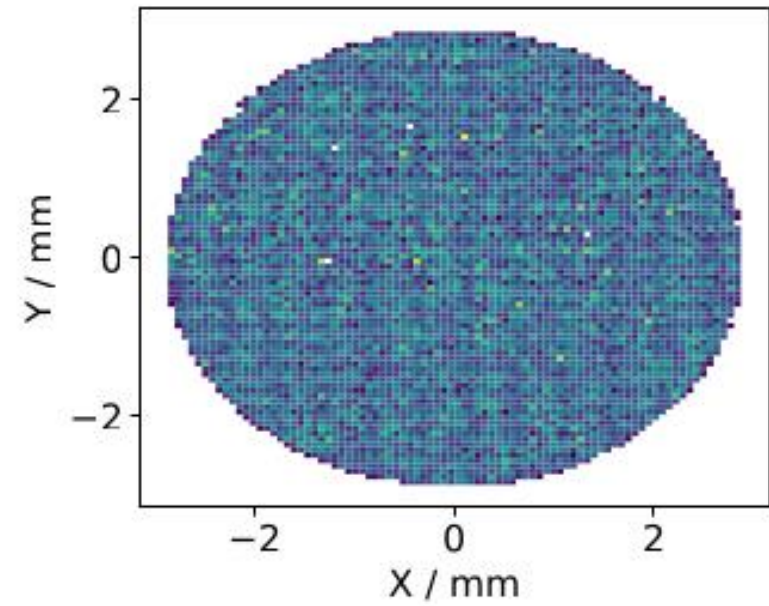

Myself

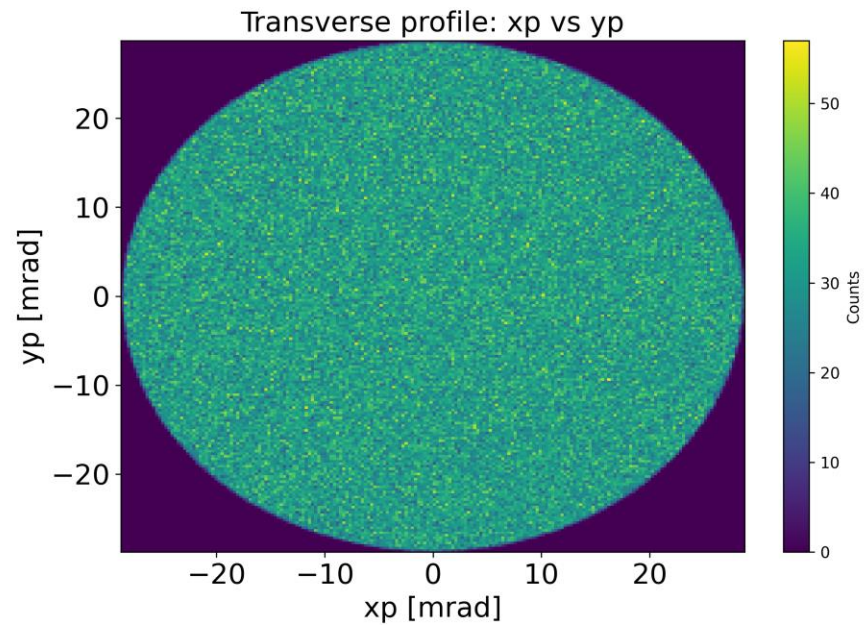

CDR

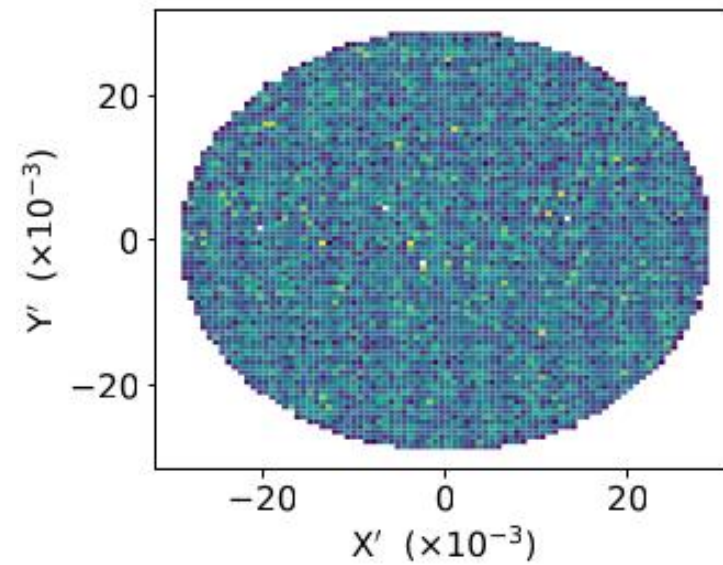


TWISS parameters from the source for BDSIM optics simulations


	With SC effect	Without SC effect
	CDR	Myself
betax	35.35 m	25.289 m
betay	35.51 m	24.807 m
alphax	-355	-252.883
alphay	-356	-252.304
Dx	~0	~0
Dy	~0	~0
Dxp	~0	~0
Dyp	~0	~0
ϵ_x	5.91e-8 m rad	8.105e-08 m rad
ϵ_y	5.87e-8 m rad	8.366e-08 m rad

BDSIM optics results

Myself

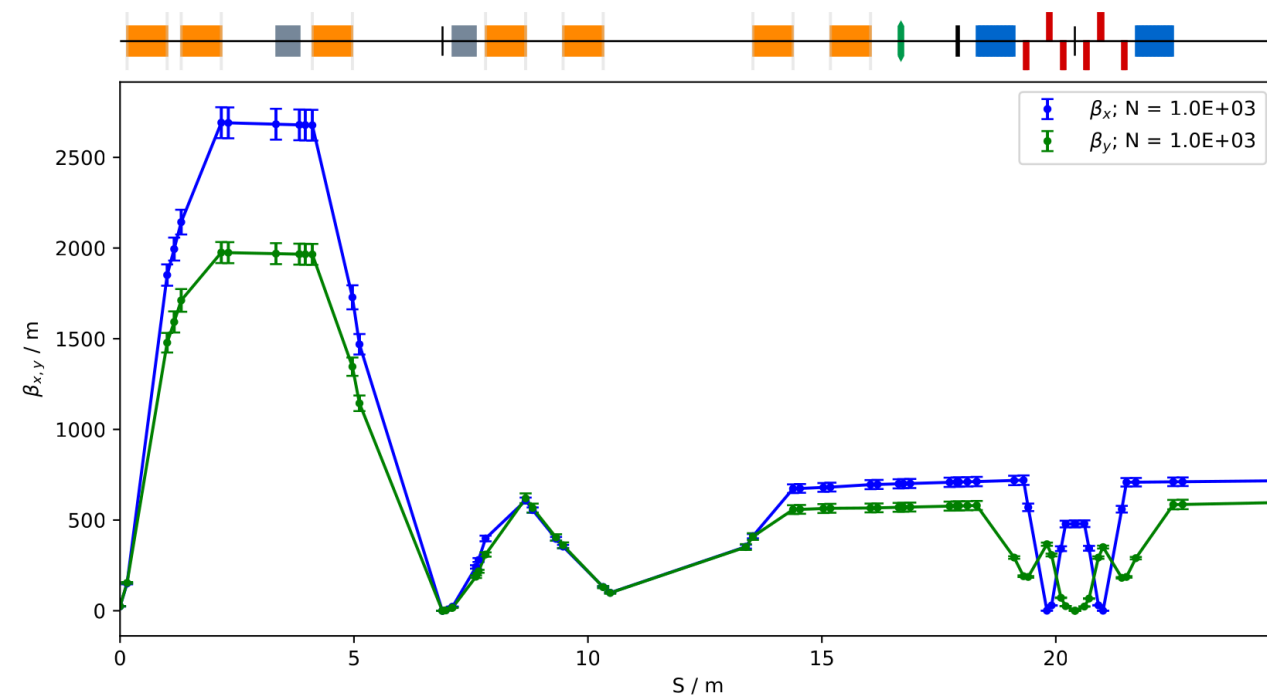


CDR

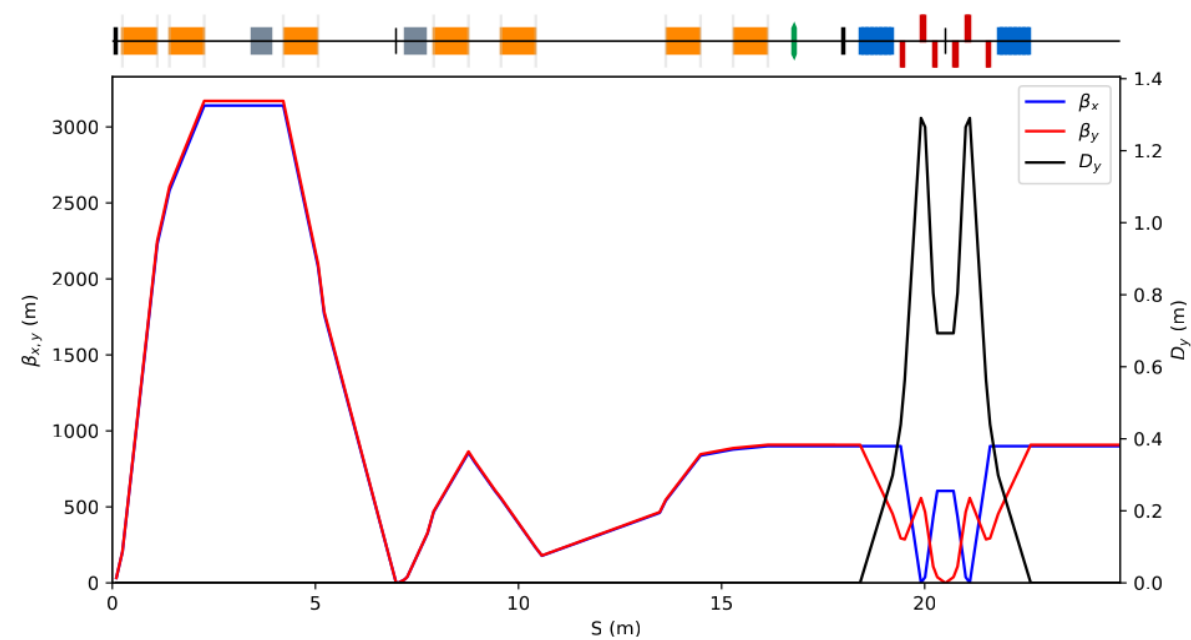

BDSIM optics results

Myself

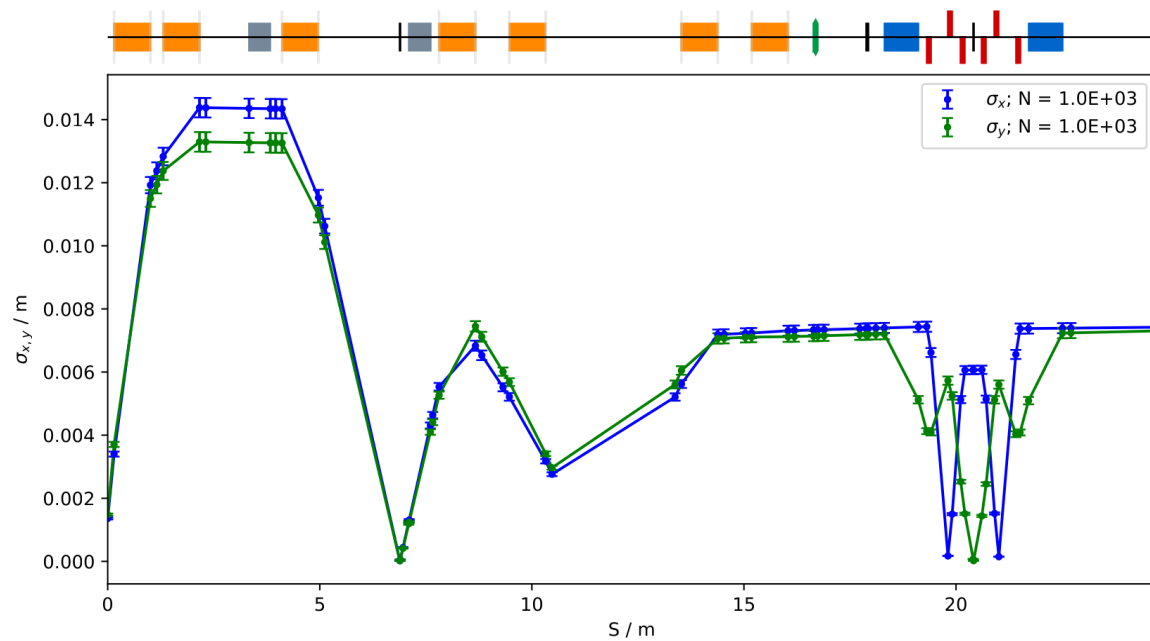

CDR

